

THIS DOCUMENT AND EACH AND EVERY  
PAGE HEREIN IS HEREBY RECLASSIFIED

FROM *Restricted* TO *Unclassified*

AS PER LETTER DATED *12/15/83*

*Notice # 4*

# RESEARCH MEMORANDUM

INVESTIGATION OF THE INFLUENCE OF FUSELAGE AND TAIL SURFACES  
ON LOW-SPEED STATIC STABILITY AND ROLLING CHARACTERISTICS  
OF A SWEEP-WING MODEL

By

John D. Bird, Jacob H. Lichtenstein, and Byron M. Jaquet

Langley Memorial Aeronautical Laboratory  
Langley Field, Va.

ENGINEERING DEPT. LIBRARY  
CHANCE VUGHT AIRCRAFT  
STRATFORD, CT.

This document contains classified information affecting the National Defense of the United States within the meaning of the Espionage Act, USC 50:31 and 32, the transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law. Information classified may be imparted only to personnel of the military and naval service of the United States, appropriate civilian agencies and employees of the Federal Government who have a legitimate interest therein and to United States citizens of known loyalty and discretion who of necessity must be informed thereof.

## NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

WASHINGTON

October 15, 1947

~~RESTRICTED~~

NACA RM No. L7H15

C.1 (C.144)

KM L7H15

10/17/47

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUM

INVESTIGATION OF THE INFLUENCE OF FUSELAGE AND TAIL SURFACES  
ON LOW-SPEED STATIC STABILITY AND ROLLING CHARACTERISTICS  
OF A SWEEP-WING MODEL

By John D. Bird, Jacob H. Lichtenstein, and Byron M. Jaquet

SUMMARY

A wind-tunnel investigation was made in the Langley stability tunnel for determining the influence of the fuselage and tail surfaces on the static stability and rotary derivatives in roll of a transonic airplane configuration which had  $45^\circ$  sweptback wing and tail surfaces.

The tests made in straight flow showed that the wing alone has marginal longitudinal stability characteristics near maximum lift. The variation of rolling-moment coefficient with angle of yaw of the complete model is almost the same as for the wing alone.

The results of the tests made in simulated rolling flight indicate that for this model the effects of the fuselage and tail surfaces on the rate of change of the rolling-moment, yawing-moment, and side-force coefficients with rolling are small in comparison with the effect of the angle of attack on these rotary characteristics. Large changes in the variation of the above derivatives with angle of attack occur near maximum lift. The vertical tail produces larger increments of the rate of change of lateral-force and yawing-moment coefficients with wing-tip helix angle than the fuselage or horizontal tail.

INTRODUCTION

Estimation of the dynamic-flight characteristics of aircraft requires a knowledge of the component forces and moments arising from the orientation of the model with respect to the air stream (static derivatives), and from the rate of angular displacement with respect to the air stream (the rotary derivatives). The forces and moments arising from orientation of the model are determined

by use of conventional wind-tunnel tests, and, until the recent use of large amounts of wing sweep, the rotary derivatives at other than very high angles of attack were satisfactorily estimated by theoretical means. Unpublished data and the calculations of reference 1, however, show that for swept wings the derivatives in roll can not be satisfactorily predicted by existing theoretical means, particularly at moderate and high lift coefficients. The investigation discussed herein was conducted for determination of the influence of the tail surfaces and fuselage of an airplane on the low-speed rotary derivatives in roll of a transonic airplane configuration having  $45^\circ$  sweptback wing and tail surfaces. The static stability characteristics of various configurations of the model were determined in the course of the tests.

### SYMBOLS

The results of the tests are presented as standard coefficients of forces and moments which are referred to the stability axes whose origin is assumed at the projection on the plane of symmetry of the quarter-chord point of the mean geometric chord of the wing of the model tested. The stability axes system is shown in figure 1. The coefficients and symbols used herein are defined as follows:

|       |                                                            |
|-------|------------------------------------------------------------|
| $C_L$ | lift coefficient $\left(\frac{L}{qS}\right)$               |
| $C_X$ | longitudinal-force coefficient $\left(\frac{X}{qS}\right)$ |
| $C_Y$ | lateral-force coefficient $\left(\frac{Y}{qS}\right)$      |
| $C_l$ | rolling-moment coefficient $\left(\frac{L'}{qSb}\right)$   |
| $C_m$ | pitching-moment coefficient $\left(\frac{M}{qSc}\right)$   |
| $C_n$ | yawing-moment coefficient $\left(\frac{N}{qSb}\right)$     |
| $L$   | lift, negative of $Z$ force in figure 1                    |
| $X$   | longitudinal force                                         |
| $Y$   | lateral force                                              |
| $L'$  | rolling moment about X-axis                                |
| $M$   | pitching moment about Y-axis                               |
| $N$   | yawing moment about Z-axis                                 |

|                                                         |                                                        |
|---------------------------------------------------------|--------------------------------------------------------|
| $q$                                                     | dynamic pressure $\left(\frac{1}{2}\rho V^2\right)$    |
| $\rho$                                                  | mass density of air                                    |
| $V$                                                     | free-stream velocity                                   |
| $S$                                                     | wing area                                              |
| $b$                                                     | span of wing                                           |
| $c$                                                     | chord of wing, measured parallel to axis of symmetry   |
| $\alpha$                                                | angle of attack measured in plane of symmetry, degrees |
| $\psi$                                                  | angle of yaw, degrees                                  |
| $\frac{pb}{2V}$                                         | wing-tip helix angle, radians                          |
| $p$                                                     | rate of roll, radians per second                       |
| $C_{Y_\psi} = \frac{\partial C_Y}{\partial \psi}$       |                                                        |
| $C_{n_\psi} = \frac{\partial C_n}{\partial \psi}$       |                                                        |
| $C_{l_\psi} = \frac{\partial C_l}{\partial \psi}$       |                                                        |
| $C_{Y_p} = \frac{\partial C_Y}{\partial \frac{pb}{2V}}$ |                                                        |
| $C_{n_p} = \frac{\partial C_n}{\partial \frac{pb}{2V}}$ |                                                        |
| $C_{l_p} = \frac{\partial C_l}{\partial \frac{pb}{2V}}$ |                                                        |

#### APPARATUS AND TESTS

The tests described herein were conducted in the 6-foot circular test section of the Langley stability tunnel. This section is equipped with a motor-driven rotor which imparts a twist to the air stream so that a model mounted rigidly in the tunnel is in a field of flow similar to that which exists about

an airplane in rolling flight (reference 2). The test model is mounted on a single strut which is connected to a conventional six-component balance system.

The model used for the subject tests was a transonic configuration having  $45^\circ$  sweptback wing and tail surfaces. These surfaces had NACA 0012 airfoil sections normal to the leading edge (thickness ratio 0.085 parallel to plane of symmetry), and a taper ratio of 1. The fuselage was a body of revolution which had a circular-arc profile and a fineness ratio of 8.34. A view of the model mounted in the tunnel is shown as figure 2, and complete geometric characteristics of the model are given in figure 3.

The test configurations and the symbols used in identifying the data on the figures are given in the following table. The wing-alone data were obtained from unpublished tests.

|                                                                 |               |
|-----------------------------------------------------------------|---------------|
| Wing . . . . .                                                  | W             |
| Fuselage . . . . .                                              | F             |
| Wing and fuselage . . . . .                                     | W + F         |
| Wing, fuselage, and vertical tail . . . . .                     | W + F + V     |
| Wing, fuselage, vertical tail, and<br>horizontal tail . . . . . | W + F + V + H |

Six-component measurements were made in straight flow through the angle-of-attack range from  $\alpha = 0^\circ$  to  $\alpha = 26^\circ$  at values of  $\psi$  of  $0^\circ$  and  $\pm 5^\circ$ , and through the yaw range from  $\psi = 0^\circ$  to  $\psi = 30^\circ$  at values of  $\alpha$  of  $0^\circ$ ,  $6.2^\circ$ , and  $12.5^\circ$ . These same measurements at  $\psi = 0^\circ$  were made in rolling flow at positive and negative rolling velocities corresponding to values of  $\frac{pb}{2V}$  of  $\pm 0.0446$ .

Rotation in positive and negative directions was used in order to eliminate any asymmetrical effects associated with the model or air stream. All tests were run at a dynamic pressure of 40 pounds per square foot which corresponds to a Mach number of 0.17 and a Reynolds number of 1,400,000.

#### CORRECTIONS

The following corrections for jet-boundary effects were applied to the data:

$$\Delta C_D = \delta_w \left( \frac{S}{C} \right) C_{LT}^2$$

$$\Delta C_l = K C_{LT}$$

$$\Delta \alpha = 57.3 \delta_w \left( \frac{S}{C} \right) C_{LT}$$

where

- $\delta_w$  boundary-correction factor from reference 3
- $S$  wing area, square feet
- $C$  tunnel cross-sectional area, square feet
- $C_{LT}$  uncorrected lift coefficient
- $C_{lT}$  uncorrected rolling-moment coefficient
- $K$  correction factor from reference 4 corrected for application to these tests by taking into account changes in model and tunnel size

No corrections were made for tunnel blocking or support strut tares. Tares were determined for a few cases and the results indicated that, although there were large tare corrections to the drag coefficient, the corrections to the derivatives of the forces and moments with respect to yaw angle and wing-tip helix angle were in most cases negligible.

Although a recent publication, reference 5, presents a more exact method of determining  $\delta_w$ , the method used herein, as outlined in reference 3, is believed to give sufficiently accurate results for this model-tunnel configuration.

## RESULTS AND DISCUSSION

### Presentation of Data

The results of this investigation are presented in figures 4 to 9. Curves are given in each plot for all configurations tested in order to facilitate comparison. Figure 4 presents the lift, drag, and pitching-moment characteristics of the test configurations

for the angle-of-attack range at  $\psi = 0$  together with a cross plot of the pitching-moment coefficient against lift coefficient. Figures 5, 6, and 7 present the variation of the rolling-moment, yawing-moment, and lateral-force coefficients with angle of yaw for angles of attack of  $0^\circ$ ,  $6.2^\circ$ , and  $12.5^\circ$ . The derivatives  $C_{l_\psi}$ ,  $C_{n_\psi}$ , and  $C_{y_\psi}$  are presented for the angle-of-attack range in figure 8. Figure 9 presents the derivatives  $C_{l_p}$ ,  $C_{n_p}$ , and  $C_{y_p}$  for the angle-of-attack range.

### Characteristics in Straight Flow

The longitudinal stability characteristics of all model configurations other than the complete model and the fuselage alone were marginal in the critical region near maximum lift. The longitudinal stability characteristics of the complete model are satisfactory for the entire lift range (fig. 4). Marginal characteristics for the wing alone are predicted by the correlation of longitudinal stability characteristics of swept wings presented in reference 6.

The curves of figures 5, 6, and 7 indicate approximately a linear variation of yawing-moment, rolling-moment, and pitching-moment coefficients with angle of yaw for angles of attack up to  $12.5^\circ$ .

The curves of figure 8 indicate that, up to maximum lift,  $C_{l_\psi}$  is primarily a function of the characteristics of the wing alone. This fact is evidenced by the proximity of the curves of  $C_{l_\psi}$  plotted against angle of attack for the various test configurations. With regard to  $C_{n_\psi}$  the vertical tail produces a stabilizing effect which, except at very high angles of attack, is larger than the destabilizing effect (positive increment of  $C_{n_\psi}$ ) produced by the fuselage (fig. 8). The influence of the vertical tail and the fuselage on  $C_{y_\psi}$  is of the same sign except at high angles of attack (fig. 8).

### Characteristics in Rolling Flow

From calibration tests it was determined that the lift, drag, and pitching-moment coefficients of the model were almost independent of the rate of rotation, whereas the lateral-force, rolling-moment, and yawing-moment coefficients varied linearly with rate of rotation. The derivatives, however, presented herein were obtained from tests made through the angle-of-attack range at values of  $\frac{pb}{2V}$  of  $\pm 0.0446$ .



The rolling moment due to rolling  $C_{l_p}$  for the complete model, as has been found for the wing alone, becomes more negative (increased damping) as the angle of attack is increased and remains so to a point below the angle of attack for maximum lift coefficient where a large decrease in damping occurs (fig. 9). The increase of damping in the low angle-of-attack range is attributed to increases in the slopes of the curves of  $C_L$  and  $C_D$  plotted against angle of attack. The addition of the fuselage to the wing causes a small reduction in the negative value of  $C_{l_p}$  at low and moderate angles of attack, and quite a large reduction at high angles of attack. This is in spite of the fact that the fuselage causes a slight increase in the lift-curve slope. (See fig. 4.) A possible explanation of these results is that a load of the angle-of-attack type probably is carried across the fuselage, but since the fuselage is a body of revolution and air forces must, to a great extent, act normal to the surface, a load due to rolling would not be expected to be carried across the fuselage. The addition of the vertical and horizontal tails generally causes very small increases in  $C_{l_p}$ . For almost the entire angle-of-attack range, however, larger values of  $C_{l_p}$  were obtained for the wing alone than for the complete model.

The yawing moment due to rolling  $C_{n_p}$  for the complete model follows the trend of the wing alone in that the derivative becomes positive at high angles of attack. The positive values reached, however, are not as high as for the wing alone (fig. 9). The most pronounced effect of all of the individual configuration changes on the curve of  $C_{n_p}$  plotted against angle of attack is the negative increment contributed by the vertical tail (fig. 9). The value of  $C_{n_p}$  of the fuselage was small and positive throughout the angle-of-attack range.

The lateral force due to rolling  $C_{y_p}$  varies almost linearly with angle of attack over the low angle-of-attack range for all test configurations, but falls off before maximum lift is reached (fig. 9). As in the case of  $C_{n_p}$ , the vertical tail also produces the largest increment of  $C_{y_p}$  of all the components added to the wing. This increment is of negative sign. The effects of the fuselage and horizontal tail are small as would be expected.

In general, the effects of the fuselage and tail surfaces on the values of the derivatives  $C_{l_p}$ ,  $C_{n_p}$ , and  $C_{y_p}$  of the wing are small in comparison with the effects of angle of attack on these derivatives.



## CONCLUSIONS

Wind-tunnel tests for determining the static stability characteristics and the rotary derivatives in roll of a transonic model configuration having  $45^\circ$  sweptback wing and tail surfaces indicate the following conclusions:

1. The longitudinal stability characteristics of the wing alone and the model without the horizontal tail surfaces are marginal in the critical region near maximum lift. The characteristics of the complete model are satisfactory.
2. The variation of the lateral-stability parameter  $C_{l_\psi}$  is primarily a function of the characteristics of the wing alone up to maximum lift.
3. The addition of the fuselage and horizontal tail surfaces to the wing has little effect on the rate of change of the rolling-moment, yawing-moment, and lateral-force coefficients with wing-tip helix angle.
4. The addition of the vertical tail to the model produces appreciable increments in the rate of change of the rolling-moment, yawing-moment, and lateral-force coefficients with rolling, but these variations are small in comparison with the effects of angle of attack on these rotary characteristics.

Langley Memorial Aeronautical Laboratory  
National Advisory Committee for Aeronautics  
Langley Field, Va.

## REFERENCES

1. Weissinger, J.: The Lift Distribution of Swept-Back Wings. NACA TM No. 1120, 1947.
2. MacLachlan, Robert, and Letko, William: Correlation of Two Experimental Methods of Determining the Rolling Characteristics of Unswept Wings. NACA TN No. 1309, 1947.
3. Silverstein, Abe, and White, James A.: Wind-Tunnel Interference with Particular Reference to Off-Center Positions of the Wing and to the Downwash at the Tail. NACA Rep. No. 547, 1935.
4. Swanson, Robert S.: Jet-Boundary Corrections to a Yawed Model in a Closed Rectangular Wind Tunnel. NACA ARR, Feb. 1943.
5. Eisenstadt, Bertram J.: Boundary-Induced Upwash for Yawed and Swept-Back Wings in Closed Circular Wind Tunnels. NACA TN No. 1265, 1947.
6. Shortal, Joseph A., and Maggin, Bernard: Effect of Sweepback and Aspect Ratio on Longitudinal Stability Characteristics of Wings at Low Speeds. NACA TN No. 1093, 1946.

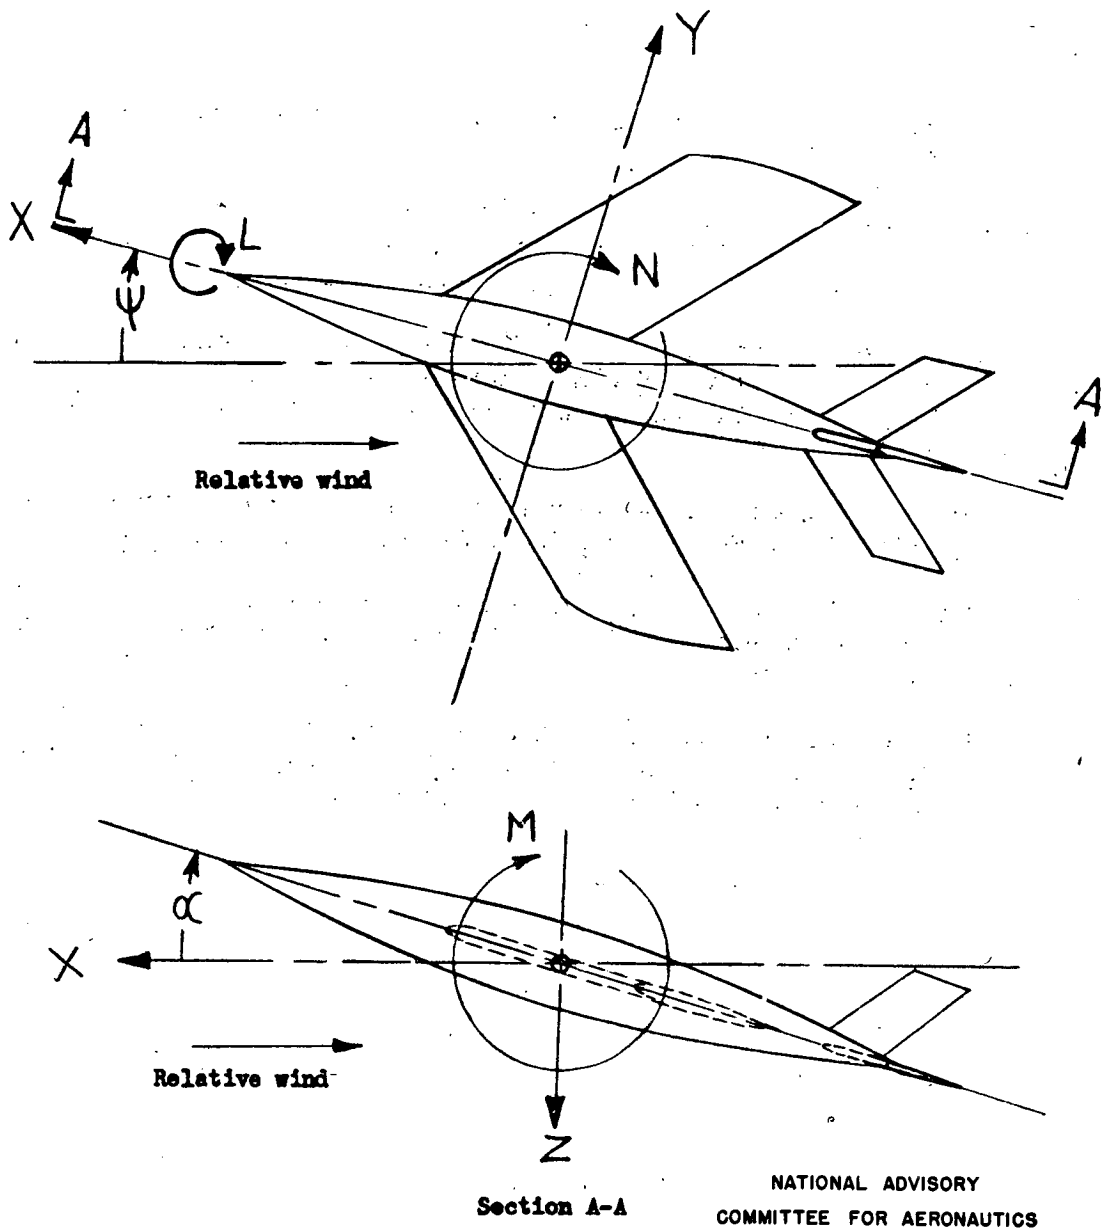


Figure 1.- Stability system of axes. Positive values of forces, moments, and angles are indicated by arrows.



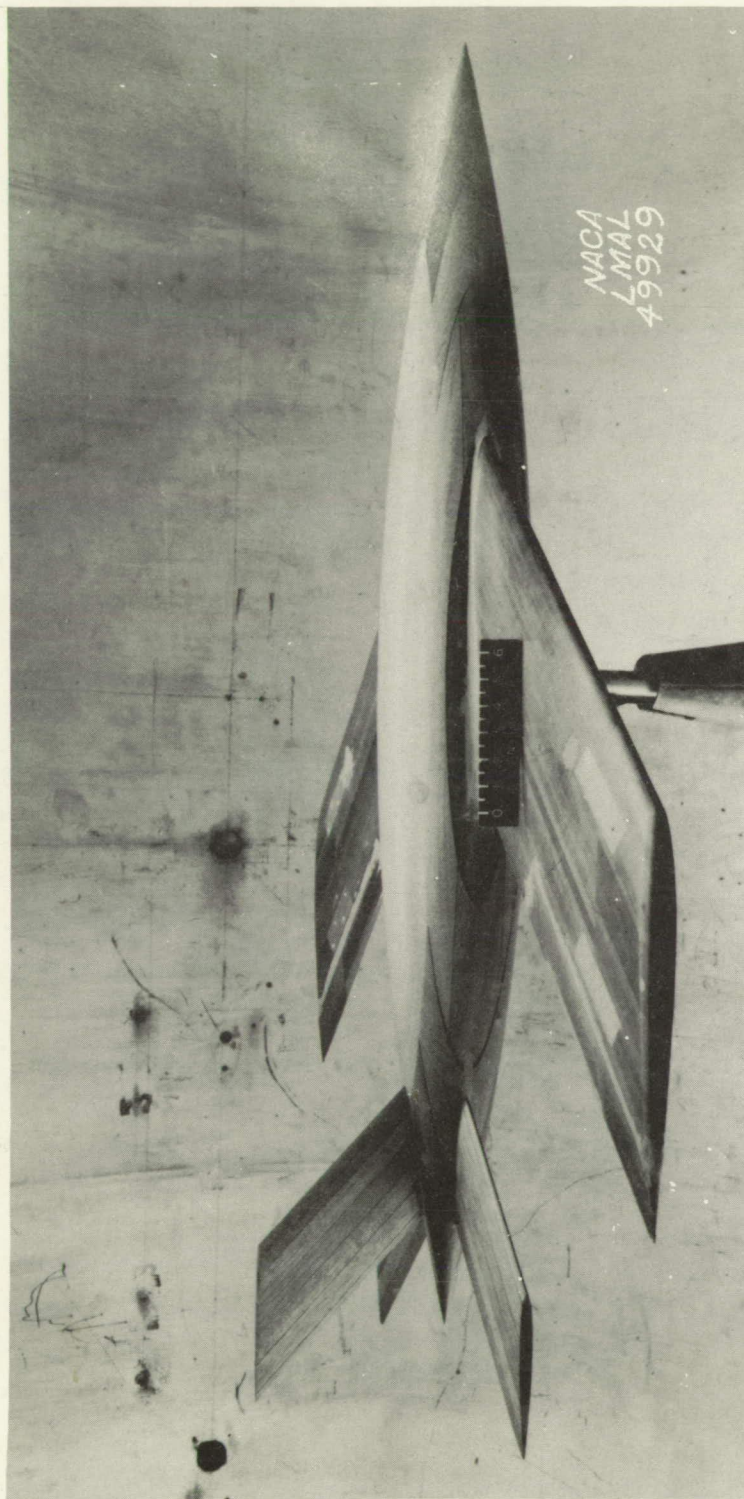


Figure 2.- Complete model in tunnel.

***PAGE MISSING FROM AVAILABLE VERSION***

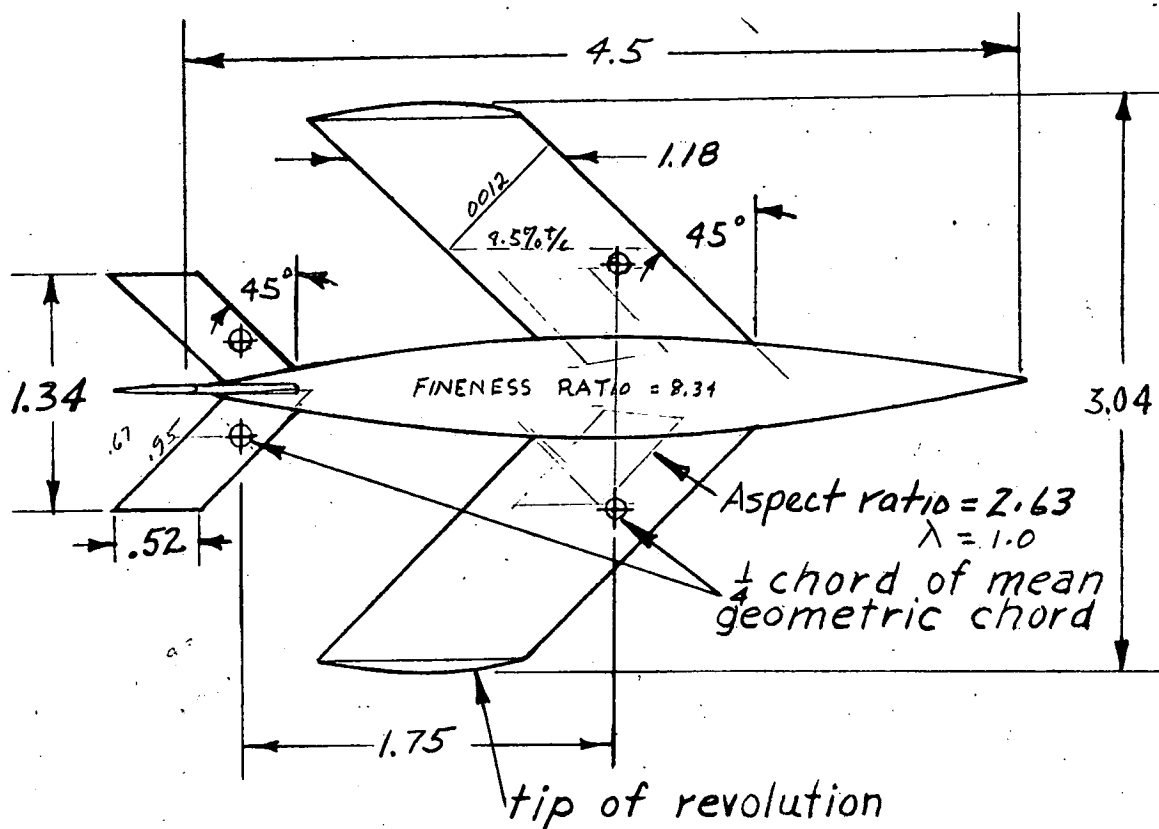

Dimensions in feet

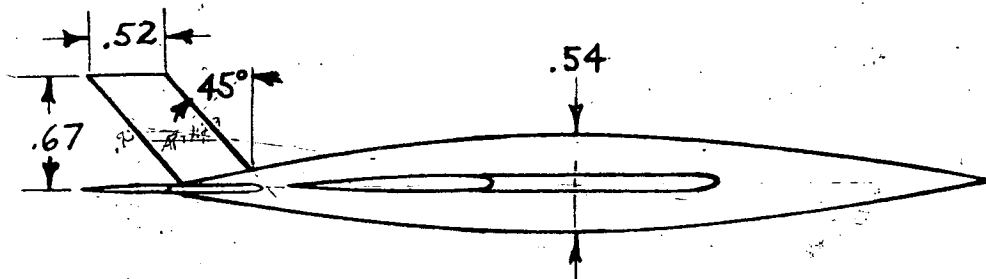

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS

Figure 3.- Geometric characteristics of model.

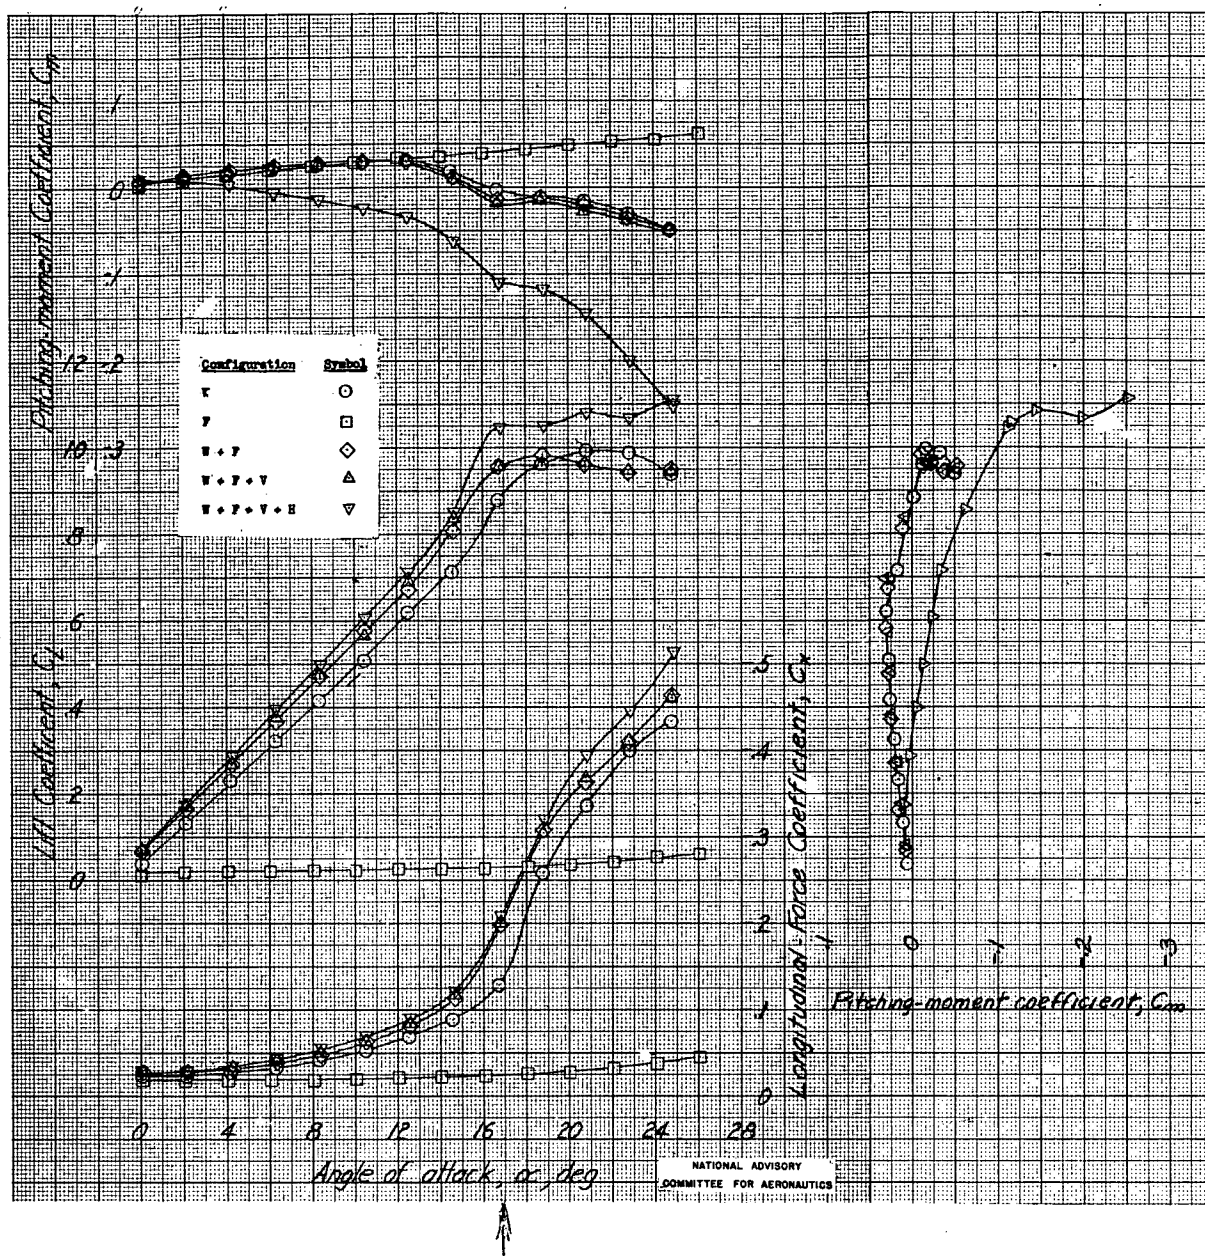


Figure 4.- Variation of lift, longitudinal-force, and pitching-moment coefficients with angle of attack for all model configurations.  $\psi = 0^\circ$ .





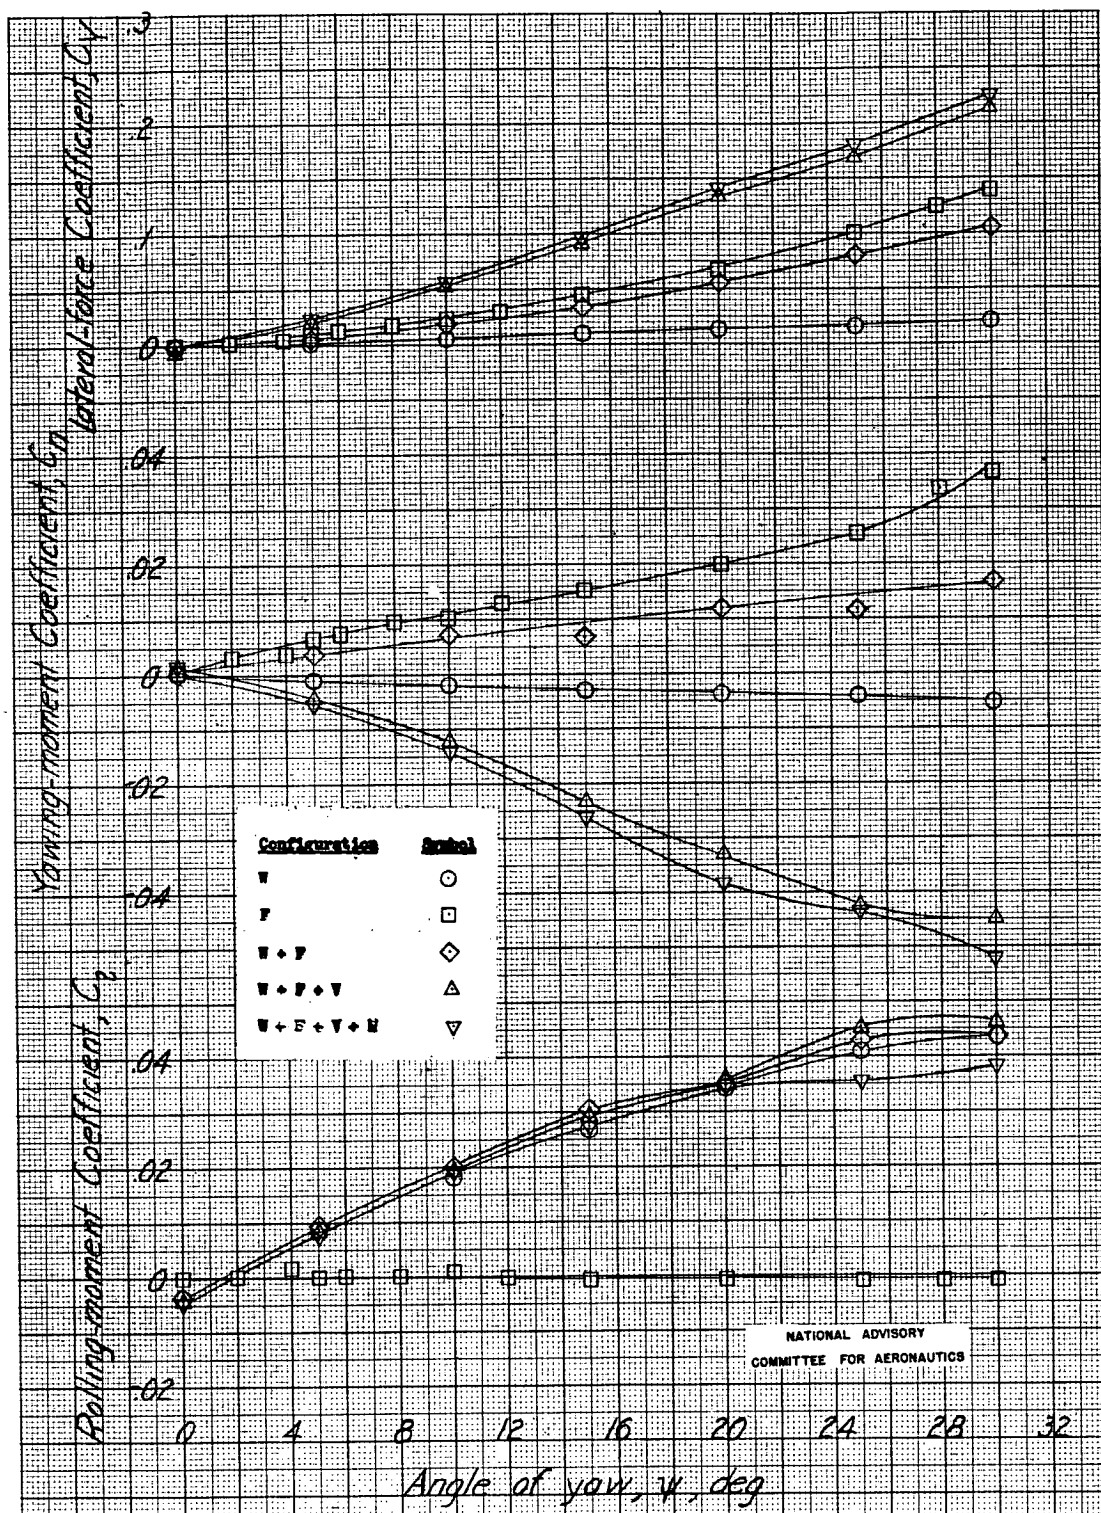


Figure 6.- Variation of rolling-moment, yawing-moment, and lateral-force coefficients with angle of yaw for all model configurations.  $\alpha = 6.2^\circ$ .

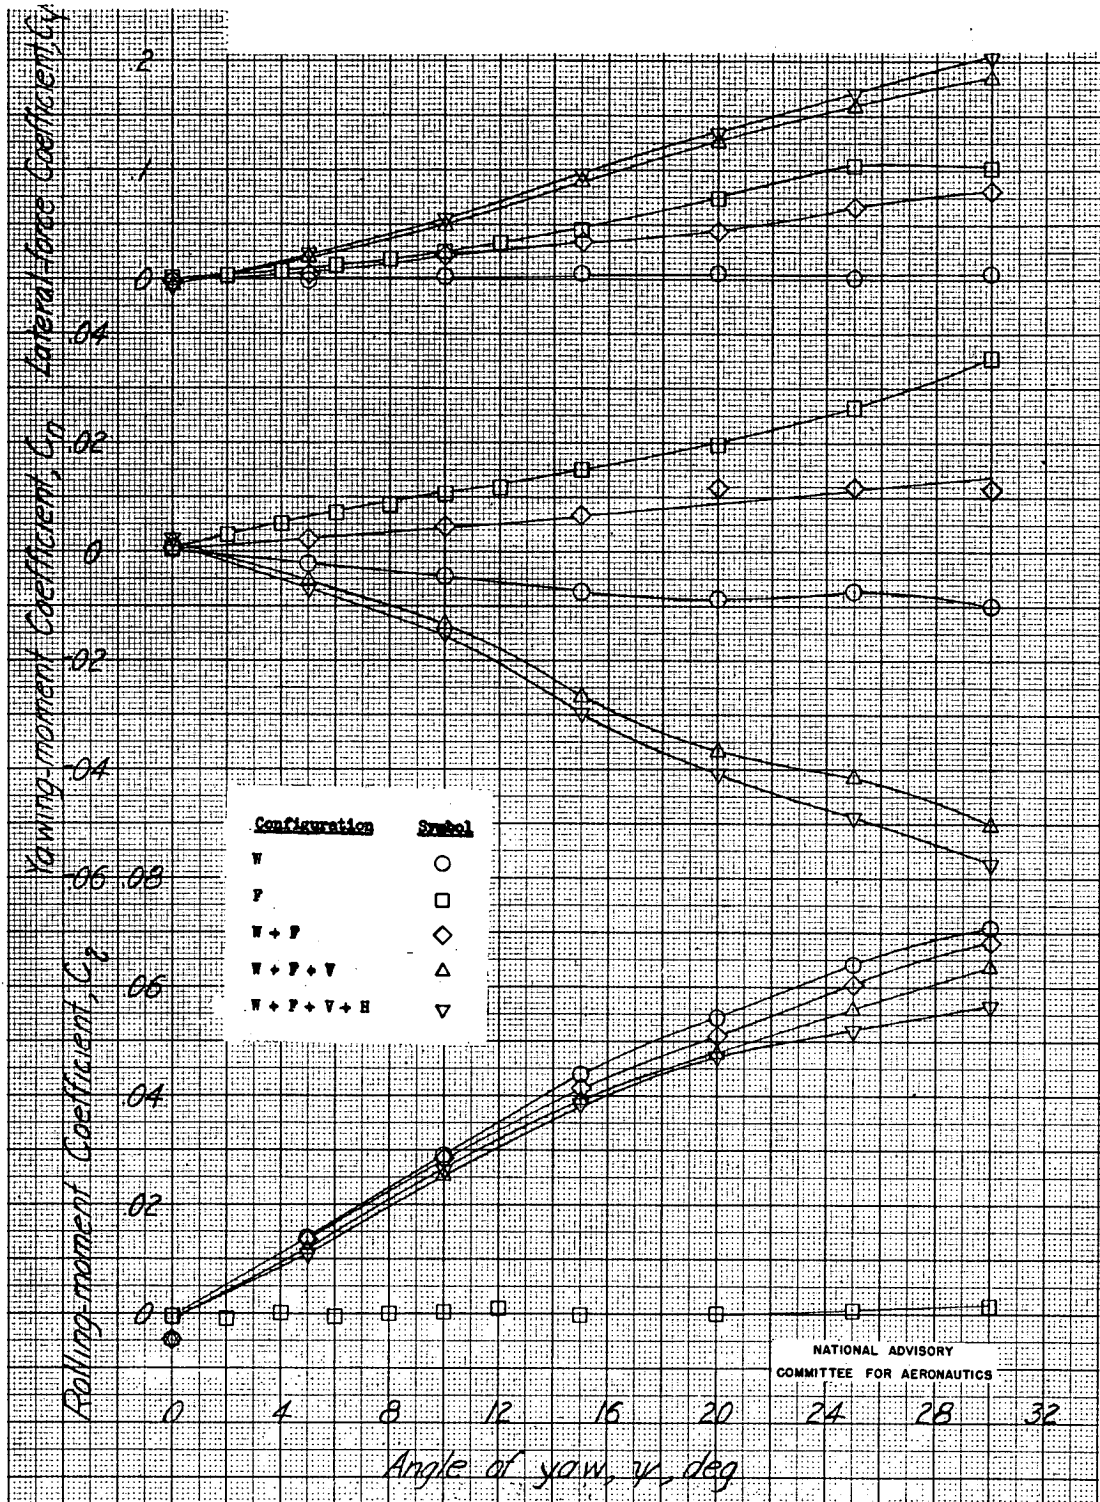


Figure 7. - Variation of rolling-moment, yawing-moment, and lateral-force coefficients with angle of yaw for all model configurations.  $\alpha = 12.5^\circ$ .

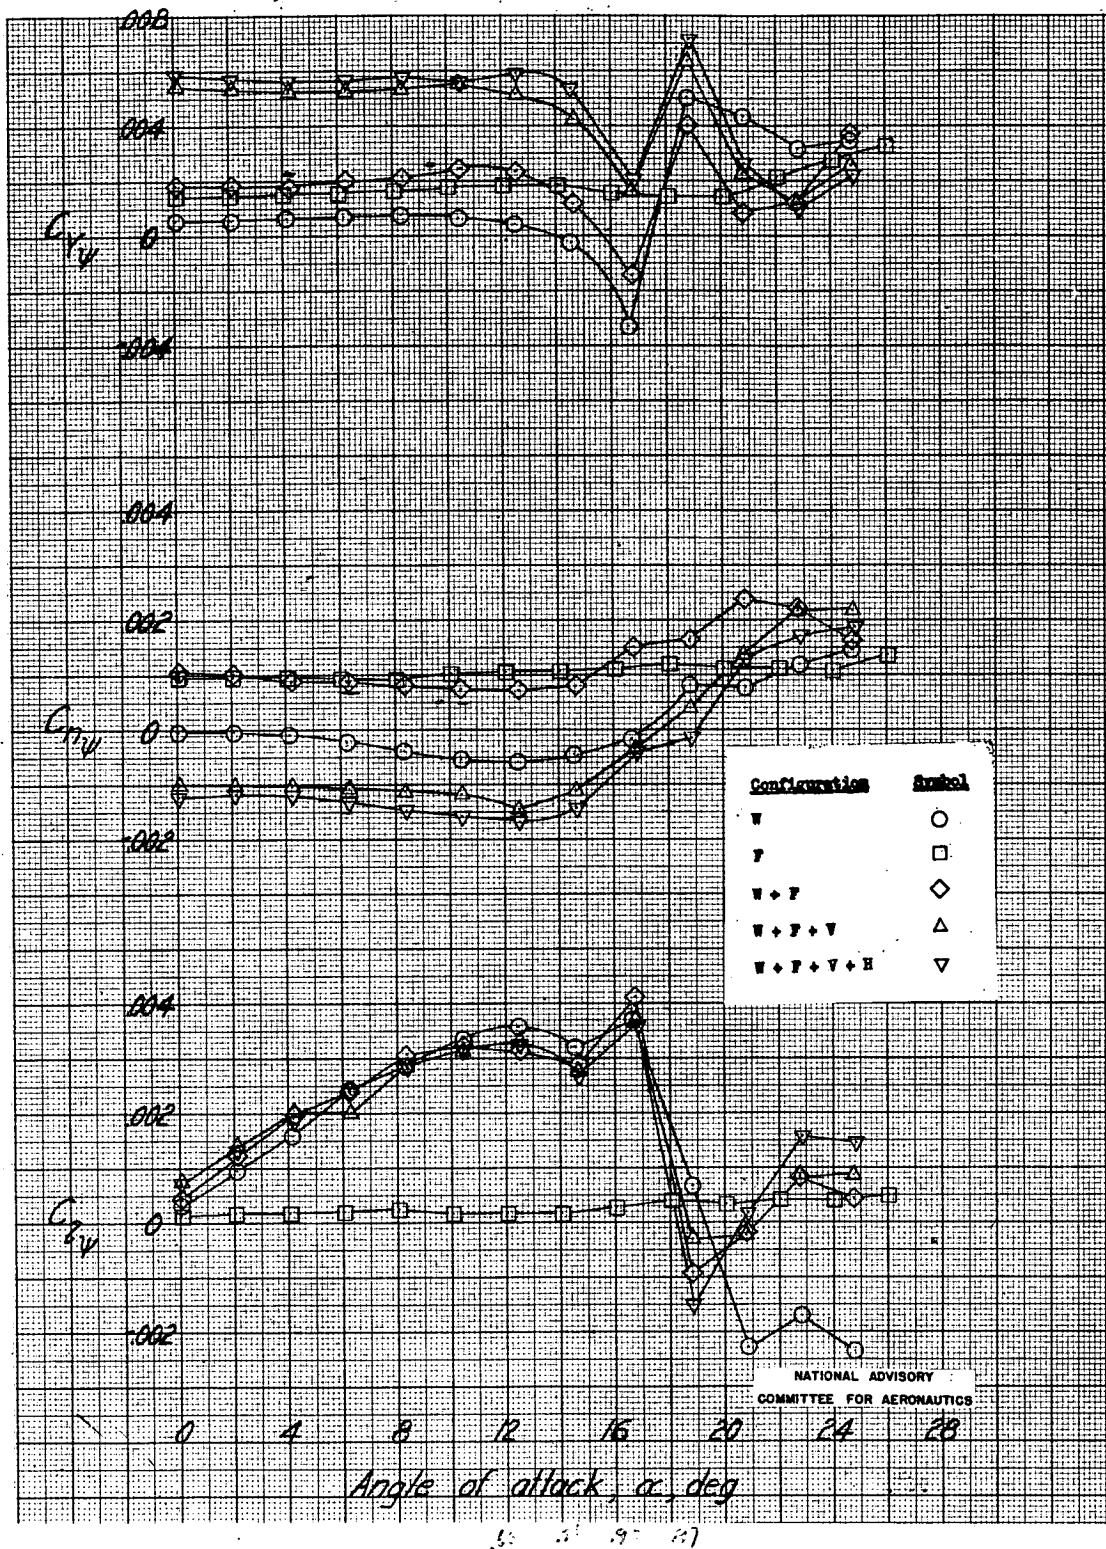


Figure 8.- Variation of  $C_{L\psi}$ ,  $C_{n\psi}$ , and  $C_{Y\psi}$  with angle of attack for all model configurations.  $\psi = 0^\circ$ .

BASED ON DATA OBTAINED AT  $C_L \pm 5^\circ$



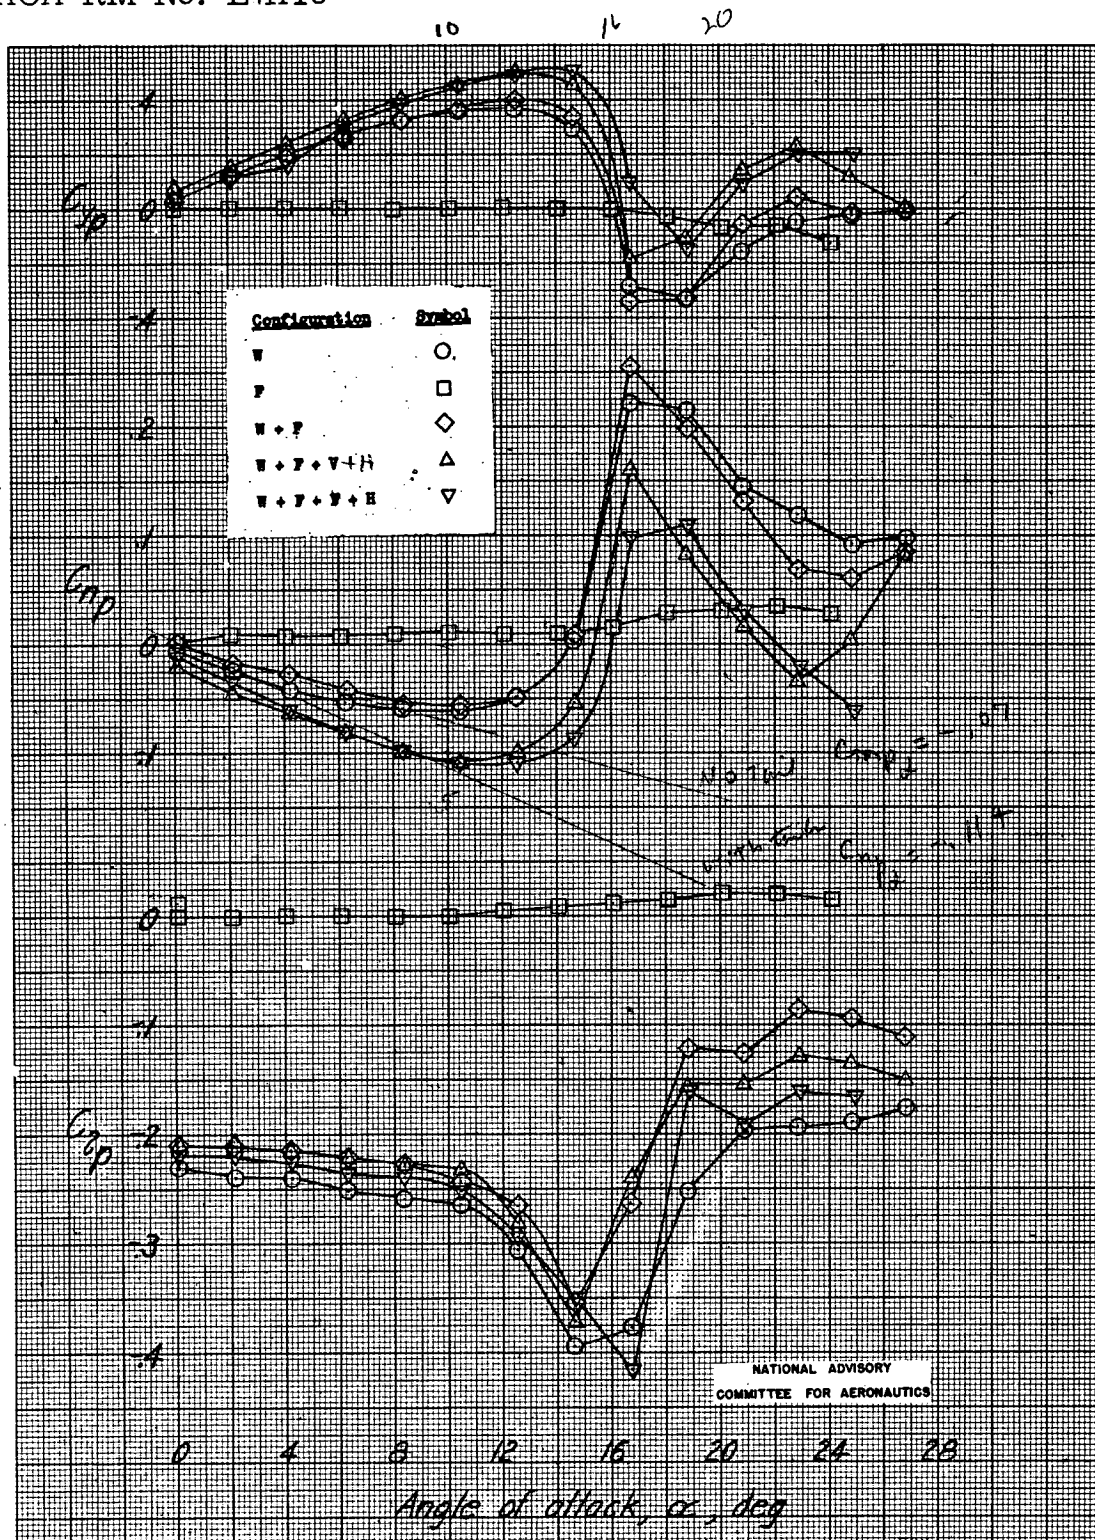


Figure 9.- Variation of  $C_L$ ,  $C_n$ , and  $C_Y$  with angle of attack for all model configurations.  $\psi = 0^\circ$ .